

SECURALL®

Safety Storage Equipment

PRODUCT CATALOG

**FLAMMABLE
E AWAY**

SECURALL®
SAFETY STORAGE CABINET
FOR FLAMMABLE LIQUIDS

securallproducts.com

Table of Contents

SAFETY STORAGE CABINETS

Features & Specifications	3
Containment Classification & Product Information	4
Flammable Storage - Cans	5
Flammable Storage - Drums	6
Acid & Corrosive Storage / Polyethylene Cabinets	7
Paint & Ink Storage / Spill Containment Cabinet	8
Hazardous Waste Storage / Pesticide Storage	9
Laboratory Storage & Wall Mount & Stackable Storage	10
Aluminum LP / Oxygen Gas Cylinder Storage / Vertical LP Storage	11
Medical Gas Storage Cabinets	12
Outdoor Weatherproof Flammable Storage	13
Industrial & Commercial Storage / Mobile Storage	14
Stainless Steel Storage	15
Custom Cabinets	18

FIRE RATED SECURITY SAFES

High Security Storage / Weapons Storage	16
Firearm & Security Safes	17

CHEMICAL STORAGE BUILDINGS

Hazmat Chemical Storage	19
Agri-Chemical Storage	20
Outdoor Storage - Buildings & Lockers	21
Building Accessories	22
Building Ramps & Heavy Duty Drum SpillStation	23
Custom Storage Building	30

Code Compliance

Cabinets	25	Outdoor Safety Storage Buildings	29
----------------	----	--	----

SECURALL . . . FIRST IN QUALITY, PRICE, DELIVERY

Manufactured in the U.S.A.



Specifications are subject to change without notice

Copyright 2006


Features & Specifications



Double Wall Construction with 1 1/2" Air Space
(NFPA 30, OSHA, FM 6050)

Large Warning Label, (also available in French and Spanish)
(NFPA 30, OSHA 1910.106, FM 6050)

Two 2" Vents with Flash Arrestors
(FM 6050)



Fusible Link Assembly on Self-Closing Models

Flush Mounted Locking Handle



Non-sparking closure w/ 3-Point, Self-Latching Doors
(NFPA 30, OSHA 1910.106, FM 6050)

Structurally Reinforced 18-Gauge All-Welded Construction
(NFPA 30, OSHA 1910.106, FM 6050)



Static Ground Connections
(FM 6050, OSHA, NFPA 70)

Continuous Piano Hinge



Leak Proof Sill 2" Deep, Prevents Leakage in the Event of Accidental Spills
(NFPA 30, OSHA 1910.106, FM 6050)

Finished in Chemical, UV & Impact Resistant Urethane

Adjustable Zinc Plated Leveling Legs



SAFETY BEGINS WITH SECURALL

SECURALL's innovative design features and conscientious customer service continue to be the benchmark of excellence in the safety storage industry.

Our dedication to quality, delivery and manufacturing efficiencies has established SECURALL as an industry leader in safety storage cabinets and buildings, while our commitment to customers' needs has resulted in the most comprehensive line of safety storage products available.

If you have a special situation that requires a customized design, we will welcome the opportunity to work with you to provide a safe storage solution.

Make SECURALL your primary source for quality safety storage and security products.

Containment Classifications

NFPA FLAMMABLE & COMBUSTIBLE CLASSES

FLAMMABLES			COMBUSTIBLES		
	Flash Point	Boiling Point		Flash Point	Boiling Point
Class IA	<73°F (22.8°C)	<100°F (37.8°C)	Class IIA	<100°F (37.8°C) and <140°F (60°C)	-
Class IB	<73°F (22.8°C)	<100°F (37.8°C)	Class IIIB	<140°F (60°C) and <200°F (93°C)	-
Class IC	<73°F (22.8°C) and <100°F (37°C)	-	Class IIIC	<200°F (93°C)	-

A maximum of 120 - gallons of Class I, Class II, and Class IIIA liquids may be stored in a single storage cabinet¹. The number of cabinets in a single fire area may not exceed 3. Proper storage of additional cabinets within a single fire area is limited to groups no larger than 3, so long as a minimum of 100ft separation exists between all groups. The maximum number of cabinets in any one group may be increased to 6 if the cabinets are stored in an Industrial Occupancy facility that is equipped with an automatic sprinkler system meeting NFPA 13 standards for installation¹.

SECURALL[®] utilizes a 3-point, non-sparking button latch rod system that provides the ultimate in security, safety and compliance. Not all work surfaces are level, therefore each cabinet is equipped with (4) **Leveling Legs** to level the cabinet and doors for successful closure every time (see Figure 1).

Additionally, all **Self-Close Door** models are equipped with Fusible Links to hold doors open while accessing contents of cabinet. Links are designed to melt at 165°F so doors will automatically close in case of fire when properly used (see Figure 2).

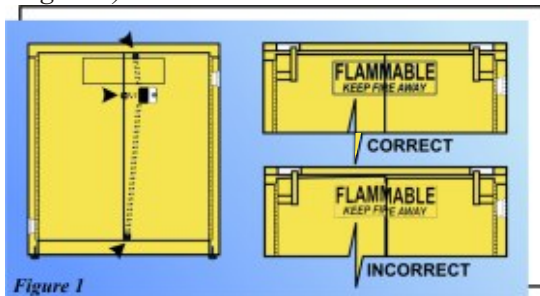


Figure 1

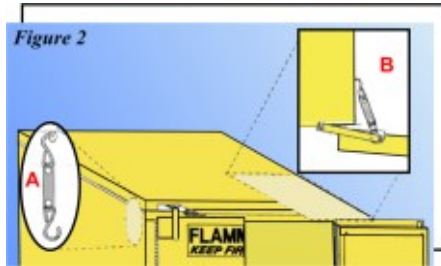


Figure 2

- A:** Insert one end of fusible link hook into desired punch-hole
- B:** Attach other end of link assembly as indicated in

Paint


The interior and exterior finish consists of an aliphatic polyurethane finish. This polyurethane coating has chemical properties to withstand salt spray, chemical rub, fading due to UV exposure, and other tests performed to epoxy paints. Urethane is more durable under conditions when moving items in and out of the cabinet as it resists chipping and peeling. Unless some other color is specified, cabinets will ship in designated standard color. For **custom colors**, customer must provide a paint chip.



Standard paint colors


Door Configuration

Self-Latch, Standard 2-Door
Denoted as a 100 series model no.



Self-Close, Self-Latch Sliding Door
Denoted as a 200 series model no.

Self-Close, Self-Latch Safe-T-Door
Denoted as a 300 series model no.

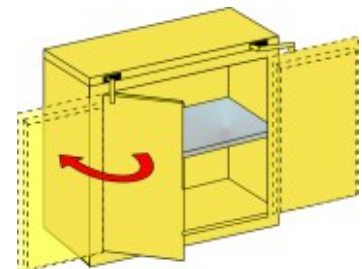

Flammable Storage - Cans

-Keep flammable liquids close to the work area in a safe and organized way while limiting employee exposure with SECURALL® Safety Storage Cabinets. Choose from a large selection of sizes from 4 to 90-gallon capacities. These are designed to meet safety requirements whenever a job involves the handling of flammable or combustible liquids. Smaller cabinets are convenient where space is limited. Standard color is Yellow.

All cabinets comply with current OSHA regulations and are designed in accordance with the standards of NFPA Code 30.



Model #A230
44"H x 43"W x 18"D



Model #A305
37"H x 24" W x 18"D




★ Model #A145
65"H x 43"W x 18"D

CABINETS FOR STORING FLAMMABLES IN SAFETY CANS/CONTAINERS

Model No.	Test Lab Approv.	Description	No. of Shelves	Exterior Dim.	Approx.	Addtn'l Shelf	Approx. Ship. Wt.
A102	*~	4 Gal. Self-Latch Standard Door	1	22 x 17 x 17	75 lbs.	S17-05	3 lbs.
A302	*~	4 Gal. Self-Close, Self-Latch Safe-T-Door	1	24 x 17 x 17	82	S17-05	3
A105	FM*~	12 Gal. Self-Latch Standard Door	1	35 x 24 x 18	138	S1-05	5
A305	FM*~	12 Gal. Self-Close, Self-Latch Safe-T-Door	1	37 x 24 x 18	148	S1-05	5
A110	FM*~	16 Gal. Self-Latch Standard Door	1	44 x 24 x 18	164	S1-05	5
A310	FM*~	16 Gal. Self-Close, Self-Latch Safe-T-Door	1	46 x 24 x 18	174	S1-05	5
A130	FM*~	30 Gal. Self-Latch Standard 2-Door	1	44 x 43 x 18	247	S2-05	12
A230	FM*~	30 Gal. Self-Close, Self-Latch Sliding Door	1	44 x 43 x 18	252	S2-05	12
A330	FM*~	30 Gal. Self-Close, Self-Latch Safe-T-Door	1	46 x 43 x 18	267	S2-05	12
A131	FM*~	30 Gal. Self-Latch Standard 2-Door	1	35 x 36 x 24	220	S15-05	13
A231	*~	30 Gal. Self-Close, Self-Latch Sliding Door	1	35 x 36 x 24	223	S15-05	13
A331	FM*~	30 Gal. Self-Close, Self-Latch Safe-T-Door	1	37 x 36 x 24	235	S15-05	13
A145★	FM*~	45 Gal. Self-Latch Standard 2-Door	2	65 x 43 x 18	337	S2-05	12
A245	FM*~	45 Gal. Self-Close, Self-Latch Sliding Door	2	65 x 43 x 18	342	S2-05	12
A345	FM*~	45 Gal. Self-Close, Self-Latch Safe-T-Door	2	67 x 43 x 18	357	S2-05	12
A160	FM*~	60 Gal. Self-Latch Standard 2-Door	2	65 x 31 x 31	372	S3-05	17
A260	*~	60 Gal. Self-Close, Self-Latch Sliding Door	2	65 x 31 x 31	377	S3-05	17
A360	FM*~	60 Gal. Self-Close, Self-Latch Safe-T-Door	2	67 x 31 x 31	394	S3-05	17
A190	FM*~	90 Gal. Self-Latch Standard 2-Door	2	65 x 43 x 31	443	S4-05	21
A290	*~	90 Gal. Self-Close, Self-Latch Sliding Door	2	65 x 43 x 31	448	S4-05	21
A390	FM*~	90 Gal. Self-Close, Self-Latch Safe-T-Door	2	67 x 43 x 31	473	S4-05	21

Caster Assembly



Constructed of heavy gauge galvanized steel; each assembly provides a wide, sturdy base and enables cabinets to be moved from one area to another safely without tipping over. Each assembly set comes with one pair of rigid locking casters and one pair of swivel locking casters. Available in colors to match all SECURALL® Safety Cabinet colors.



CABINET ACCESSORIES

Model No.	Description	Approx. Shp. Wt.
CA18	Caster Assembly for cabinets 18" deep	30
CA31	Caster Assembly for cabinets 31" deep	36

* Complies with OSHA Regulations
 FM Factory Mutual Tested and Approved
 ~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

Flammable Storage - Drums

Safe, convenient and centralized storage for flammables. Available in models to store drums in both vertical and horizontal positions. Vertical Cabinets have ball bearing **Roller Bottoms** for easy placement and removal of 55-gallon drums. From 1 to 12* 5-gallon safety cans can also be stored on the provided 18-gauge galvanized steel shelving, depending on the model. Horizontal Cabinets store one 55-gallon drum and one 5-gallon safety can. Horizontal Cabinets have tracks to guide Drum Cradle into position (*Drum cradles sold separately*). Choose from manual, sliding, or self-closing door styles. Self-closing doors have fusible link which melts at 165°F allowing the door to automatically close. Cabinets meet OSHA and NFPA Code 30 regulations. Standard color is Yellow.

*Capacities may vary depending on size and shape of Container.



Model #V260
65"H x 34"W x 34"D



* Model #V1110
65"H x 56"W x 31"D



Model #H160
50"H x 34"W x 50"D

CABINETS FOR STORING FLAMMABLES IN DRUMS

Model No.	Test Lab Approv.	No. of	Exterior Dim.	Approx. Ship Wt.	Addn'l Shelf	Approx. Ship Wt.
H160	FM*~	60 Gal. Hor. Self-Latch Standard 2-Door	50 X 34 X 50	384 lbs.	-	- lbs.
H260	*~	60 Gal. Hor. Self-Close, Self-Latch Sliding Door	50 X 34 X 50	389	-	-
H360	FM*~	60 Gal. Hor. Self-Close, Self-Latch Safe-T-Door	52 X 34 X 50	414	-	-
V160	FM~	65 Gal. Ver. Self-Latch Standard 2-Door	65 X 31 X 31	382	S9-05	16
*V260	*~	65 Gal. Ver. Self-Close, Self-Latch Sliding Door	65 X 34 X 34	400	S9-N	20
V360	FM~	65 Gal. Ver. Self-Close, Self-Latch Safe-T-Door	67 X 31 X 31	404	S9-05	16
V175	FM~	75 Gal. Ver. Self-Latch Standard 2-Door	65 X 43 X 31	419	S2-05	12
*V275	*~	75 Gal. Ver. Self-Close, Self-Latch Sliding Door	65 X 43 X 31	424	S2-05	12
V375	FM~	75 Gal. Ver. Self-Close, Self-Latch Safe-T-Door	67 X 43 X 31	448	S2-05	12
*V1110 *	FM*~	120 Gal. Ver. Self-Latch Standard 2-Door	65 X 56 X 31	581	S5-05	21
V3110	FM~	120 Gal. Ver. Self-Close, Self-Latch Safe-T-Door	67 X 56 X 31	610	S5-05	21
V1500	FM~	115 Gal. Ver. Self-Latch Standard 2-Door	65 X 56 X 31	600	S19-05	10

*All V models come with Roller Bottoms

Drum Cradle & Ramp

Model # BR24



Heavy-duty steel ramp has reinforced side edging, painted in 2-part durable urethane, and coated with non-slip stripping for grip.

- 1,000 lb. capacity permits one person to handle heavy 30 or 55-Gallon drums
- Cradle features ALL WELDED steel construction
- Rolls smoothly on 4 inch wheels



Model #DC6

CABINET ACCESSORIES

Model No.	Description	Approx. Shp. Wt.
DC6	Drum Cradle for Horizontal Drum Cabinet	50 Lbs.
BR24	Drum Cabinet Ramp	30

Acid & Corrosive Storage



Model #C124
36"H x 35"W x 22"D

Keep all acids safe and at hand with SECURALL® Acid/Corrosive Storage Cabinets for both flammable and nonflammable corrosives. Cabinets finished in corrosive-resistant two-part urethane. The leak tight sump and painted galvanized steel shelves of these cabinets are equipped with removable corrosive-resistant polyethylene trays to contain accidental spills. All models include a polyethylene sheet liner on the sump and 24-gallon models include liner on tray-top. **Cabinet by itself is not recommended for the storage of Nitric or Sulfuric Acids unless used in conjunction with PE3045 Polyethylene Cabinet as pictured to right & specified below.** Large warning label reads: CAUTION CORROSIVES. Cabinets meet OSHA and NFPA Code 30 regulations. Standard color is Blue.



★ Model #C145
65"H x 43"W x 18"D
shown with Model #PE3045

*24-Gallon Cabinet has a leak-proof tray top, which can completely contain a 5-pint spill. 24-Gallon Model also comes with a standard kick recess, measuring 3 1/4"H by 4"D.

CABINETS FOR STORING CORROSIVES/FLAMMABLES/ACIDS

Model No.	Test Lab Approv.	Description	No. of Shelves	Exterior Dim. (H" x W" x D")	Approx. Ship Wt.	Addn'l Shelf	Addn'l Poly Tray	Approx. Ship Wt.
* C124	FM*~	24 Gal. Self-Latch Standard 2-Door	1	36 x 35 x 22	207 lbs.	C1-05	P1	11 lbs.
* C224	*~	24 Gal. Self-Close, Self-Latch Sliding Door	1	36 x 35 x 22	212	C1-05	P1	11
C130	FM*~	30 Gal. Self-Latch Standard 2-Door	1	44 x 43 x 18	270	C2-05	P2	10
C230	FM	30 Gal. Self-Close, Self-Latch Sliding Door	1	44 x 43 x 18	275	C2-05	P2	10
C330	FM*~	30 Gal. Self-Close, Self-Latch Safe-T-Door	1	46 x 43 x 18	290	C2-05	P2	10
C145 ★	FM*~	45 Gal. Self-Latch Standard 2-Door	2	65 x 43 x 18	363	C2-05	P2	10
C245	FM	45 Gal. Self-Close, Self-Latch Sliding Door	2	65 x 43 x 18	368	C2-05	P2	10
C345	FM*~	45 Gal. Self-Close, Self-Latch Safe-T-Door	2	67 x 43 x 18	383	C2-05	P2	10
C160	FM*~	60 Gal. Self-Latch Standard 2-Door	2	65 x 31 x 31	396	C3-05	P3	12
C260	*~	60 Gal. Self-Close, Self-Latch Sliding Door	2	65 x 31 x 31	401	C3-05	P3	12
C360	FM*~	60 Gal. Self-Close, Self-Latch Safe-T-Door	2	67 x 31 x 31	418	C3-05	P3	12
PE3045		Polyethylene Cabinet for Harsh Acids/Corrosives	-	18 x 38 x 13	32	-	-	-

*24 Gal. models come with Tray Top and Kick Recess

Polyethylene Cabinets

Blue **Polyethylene Cabinets** are designed to fit **inside** a SECURALL® Acid/Corrosive Safety Cabinet, but may also be used as a stand-alone counter top cabinet. Constructed of high-density (.187" thick) polyethylene, allowing the safe storage of acids and corrosives near your work area (*including nitric and sulfuric acids*). Double-wall recessed doors help to control vapors. Fit two Polyethylene Cabinet in a 30-gallon cabinet or three in a 45-gallon cabinet. Labels read, "ACIDS/CORROSIVES" and display the international symbol for Corrosive Material. Shipped assembled and ready to use.



PE3045

Polyethylene Cabinet for Harsh Acids/Corrosives

Model No.	Exterior Dim. (H" x W" x D")	Approx. Ship Wt.
PE3045	18 x 38 x 13	32 lbs.

* Complies with OSHA Regulations
~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

FM Factory Mutual Tested and Approved

Paint & Ink Storage



★ Model #P160
65"H x 43"W x 18"D



Model #P140
44"H x 43"W x 18"D

Safety storage cabinets for 1-gallon paint cans are available in 20, 40, 60 and up to 120-gallon* capacities. Finished in two-part urethane paint. Warning label reads "FLAMMABLE – KEEP FIRE AWAY". Perfect for print shops or auto body repair. Available in manual, sliding, and self-closing door models. Standard colors are Red and Yellow.

CABINETS FOR STORING FLAMMABLE PAINTS/INKS

Model No.	Test Lab Approv.	Description	No. of	Capacity	Exterior Dim.	Approx. Ship Wt.	Addn'l Shelf	Approx. Ship Wt.
P120	FM*~	20 Gal. Self-Latch Standard 2-Door	2	20/1 Gal. Cans	44 x 24 x 18	169 lbs.	S1-05	5 lbs.
P320	FM*~	20 Gal. Self-Close, Self-Latch Safe-T-Door	2	20/1 Gal. Cans	46 x 24 x 18	179	S1-05	5
P140	FM*~	40 Gal. Self-Latch Standard 2-Door	3	40/1 Gal. Cans	44 x 43 x 18	271	S2-05	12
P240	FM*~	40 Gal. Self-Close, Self-Latch Sliding Door	3	40/1 Gal. Cans	44 x 43 x 18	276	S2-05	12
P340	FM*~	40 Gal. Self-Close, Self-Latch Safe-T-Door	3	40/1 Gal. Cans	46 x 43 x 18	291	S2-05	12
P160	FM*~	60 Gal. Self-Latch Standard 2-Door	5	60/1 Gal. Cans	65 x 43 x 18	373	S2-05	12
P260	FM*~	60 Gal. Self-Close, Self-Latch Sliding Door	5	60/1 Gal. Cans	65 x 43 x 18	378	S2-05	12
P360	FM*~	60 Gal. Self-Close, Self-Latch Safe-T-Door	5	60/1 Gal. Cans	67 x 43 x 18	393	S2-05	12
P1120	FM*~	120 Gal. Self-Latch Standard 2-Door	5	120 Gallons	65 x 31 x 31	414	S3-05	17
P2120	*~	120 Gal. Self-Close, Self-Latch Sliding Door	5	120 Gallons	65 x 31 x 31	419	S3-05	17
P3120	FM*~	120 Gal. Self-Close, Self-Latch Safe-T-Door	5	120 Gallons	67 x 31 x 31	436	S3-05	17

*Capacity may vary based on container shape and size

Spill Containment Cabinet



SCC172



SCC242



SCC132

- All-welded 18-gauge extra strength construction.
- Mobile cabinet features four 4" wheels.
- Flush mounted handle provides easy and fast fingertip operation.
- Cabinets have 3-point button lock self-latching doors for extra safety. All cabinets come with spring loaded adjustable shelves.
- Custom interiors are available to fit your specific needs.

Controlling unwanted spills is easier than ever with SECURALL® Spill Containment Cabinets. Keep all of your spill control supplies ready and in one organized location.

Choose from four sizes. Our larger full size cabinets are stationary and our smaller mobile model allows you to respond to cleanups by simply wheeling your supplies to the spill area. The wall-mounted cabinet keeps all your spill control supplies available without taking up floor space.

Cabinet Features



Wall Mount Brackets



Easy-move 4" casters

CABINETS FOR STORING FLAMMABLE PAINTS/INKS

Model No.	Description	No. Of Shelves	Storage Capacity	Dimensions (H x W x D)in.	Approx. Shp. Wt.
SCC242	Counter High Mobile Cabinet	2	21 Cubic Feet	42 x 36 x 24	200 lbs.
SCC172	Full Size Stationary Cabinet	4	27 Cubic Feet	72 x 36 x 18	264
SCC272	Full Size Stationary Cabinet	4	36 Cubic Feet	72 x 36 x 24	353
SCC132	Wall-mounted Cabinet	2	6 Cubic Feet	32 x 26 x 12	66

Hazardous Waste Storage

The Resource Conservation and Recovery Act (RCRA) 1984 amendments made it mandatory that hazardous waste be collected and disposed of properly. SECURALL® offers the largest capacity drum storage cabinets in the industry. All Hazardous Waste Drum Cabinets are equipped with ball bearing **Roller Bottoms** for easy loading of heavy drums, and an 18-gauge galvanized steel shelf that will hold 5-gallon containers. Standard color is Yellow.



★ Model #W1080
65"H x 56"W x 31"D

CABINETS FOR STORING HAZARDOUS WASTE IN DRUMS - indoor use

Model No.	Test Lab Approv.	Description	No. of	Exterior Dim.	Approx. Ship Wt.	Addn'l Shelf	Approx. Ship Wt.
W1040	FM*~	60 Gal. Self-Latch Standard 2-Door	1	65 x 31 x 31	382 lbs.	S9-05	7 lbs.
W2040	*~	60 Gal. Self-Close, Self-Latch Sliding	1	65 x 34 x 34	400	S9-N	10
W3040	FM*~	60 Door	1	67 x 31 x 31	404	S9-05	7
W1075	FM*~	75 Gal. Self-Close, Self-Latch Safe-T-	1	65 x 43 x 31	419	S4-05	21
W2075	*~	75 Door	1	65 x 43 x 31	424	S4-05	21
W1080	FM*~	120 Gal. Self-Latch Standard 2-Door	1	65 x 56 x 31	581	S5-05	16
W3080	FM*~	120 Gal. Self-Close, Self-Latch Sliding	1	67 x 56 x 31	610	S5-05	16

All cabinets come with Roller Bottoms



★ Model #W3045
67"H x 43" W x 18"D

CABINETS FOR STORING HAZARDOUS WASTE IN CANS - indoor use

Model No.	Test Lab Approv.	Description	No. of	Exterior Dim.	Approx. Ship Wt.	Addn'l Shelf	Approx. Ship Wt.
W1045	FM*~	45 Gal. Self-Latch Standard 2-	2	65 x 43 x 18	337 lbs.	S2-05	12 lbs.
W2045	FM*~	Door	2	65 x 43 x 18	342	S2-05	12
W3045	FM*~	45 Gal. Self-Close, Self-Latch Sliding	2	67 x 43 x 18	357	S2-05	12
W1060	FM*~	Door	2	65 x 31 x 31	372	S9-05	7
W3060	FM*~	45 Gal. Self-Close, Self-Latch Safe-T-	2	67 x 31 x 31	394	S9-05	7



Model #DC6

CABINET ACCESSORIES

Model No.	Description	Approx. Ship. Wt.
DC6	Drum Cradle	50 lbs.
BR24	Drum Cabinet Ramp	30
CA18	Caster Assembly for cabinets 18" deep)	30
CA31	Caster Assembly for cabinets 31" deep)	36

Pesticide Storage



★ Model #AG345
67"H x 43"W x 18"D

The health risks of short-term exposure to pesticides and accidental poisoning are real. SECURALL® Pesticide Cabinets provide safe, secure and controlled storage for agri-chemical products. Farms, nurseries, parks and recreation facilities can safely store pesticides and equipment. Helps restrict the handling of pesticides to those who have been appropriately trained and authorized per EPA/WPS. Choose the model to segregate and securely store up to 120-gallons of a Class I, Class II, or Class III product. Each model is equipped with 18-gauge galvanized steel shelving. Standard color is Ag Green.

Model #AG130
44"H x 43"W x 18"D

CABINETS FOR STORING PESTICIDES

Model No.	Test Lab Approv.	Description	No. of	Exterior Dim.	Approx. Ship Wt.	Addn'l Shelf	Approx. Ship Wt.
AG105	FM*~	12 Gal. Self-Latch Standard Door	1	35 x 24 x 18	138 lbs.	S1-05	5 lbs.
AG305	FM*~	12 Gal. Self-Close, Self-Latch Safe-T-	1	37 x 24 x 18	154	S1-05	5
AG130	FM*~	30 Door	1	44 x 43 x 18	247	S2-05	12
AG330	FM*~	30 Gal. Self-Latch Standard 2-Door	1	46 x 43 x 18	267	S2-05	12
AG145	FM*~	45 Gal. Self-Close, Self-Latch Safe-T-	2	65 x 43 x 18	337	S2-05	12
AG345	FM*~	45 Door	2	67 x 43 x 18	357	S2-05	12
★ AGV160	FM*~	60 Gal. Self-Latch Standard 2-Door	1	65 x 31 x 31	412	S9-05	16
★ AGV360	FM*~	60 Gal. Self-Close, Self-Latch Safe-T-	1	67 x 31 x 31	434	S9-05	16
★ AGV1110	FM*~	120 Door	1	65 x 56 x 31	618	S5-05	17
★ AGV3110	FM*~	120 Gal. Self-Latch Standard 2-Door	1	67 x 56 x 31	610	S5-05	17

*All AGV models come with Roller Bottoms

* Complies with OSHA Regulations
 FM Factory Mutual Tested and Approved
 ~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

★ Best Seller


Laboratory Storage



Model #L244
35 5/8"H x 59"W x 22"D

Model #L236
35 5/8"H x 47"W x 22"D

Avoid the fire and explosion hazards of unprotected flammable liquids and chemicals with convenient SECURALL® Laboratory Cabinets. These cabinets are specifically designed to fit under most counters, allowing more counter-top workspace. Each cabinet is equipped with 18-gauge galvanized steel shelving and painted in two-part urethane for wear resistance and a durable finish. Choose from 24, 36, or 44-gallon capacity, or custom build to suit your needs. All models have non-sparking latches, available in Self-Latching Manual Doors or Self-Closing, Self-Latching Sliding Doors. Ships in Yellow unless otherwise specified.



All cabinets come with Standard Kick Recess
3 1/4"H x 4"D

CABINETS FOR STORING FLAMMABLES

Model No.	Test Lab Approv.	Description	No. of Shelves	Exterior Dim.	Approx. Ship Wt.	Addn'l Shelf	Approx. Ship Wt.
L124	FM*~	24 Gal. Self-Latch Standard 2-Door	1	35 9/16 x 35 x 22	199 lbs.	LS5-05	12 lbs.
L224	*~	24 Gal. Self-Close, Self-Latch Sliding Door	1	35 5/8 x 35 x 22	204	LS5-05	12
L136	FM*~	36 Gal. Self-Latch Standard 2-Door	1	35 9/16 x 47 x 22	252	LS10-05	16
L236	*~	36 Gal. Self-Close, Self-Latch Sliding Door	1	35 5/8 x 47 x 22	257	LS10-05	16
L144	FM*~	44 Gal. Self-Latch Standard, 4-Door	1	35 9/16 x 59 x 22	284	LS15-05	22
L244	*~	44 Gal. Self-Close, Self-Latch Sliding Door	1	35 5/8 x 59 x 22	289	LS15-	22

All cabinets come standard with Rear-Wall Vents and also available in Stainless Steel

Wall Mount & Stackable Storage



Wall Mount Bracket

Maximum storage in a compact size! These cabinets will hold up to 24-gallons of flammable liquids without taking up valuable floor space. Each cabinet is furnished with brackets for easy wall mounting or can be placed on a bench top. Equipped with up to five adjustable 18-gauge galvanized steel shelves that can be positioned to meet your specific needs. Standard color is Yellow.



★ Model #WMA124
44"H x 43"W x 12"D



Model #WMA112
18"H x 43"W x 18"D

Cabinets 18"D are also designed to stack on top of standard 30-gallon Cabinets or on top of each other. Cabinets can be secured using **Stacking Bracket** (included). Ideal for segregating flammables, or increasing the capacity of your current cabinet. Standard color is Yellow.

CABINETS FOR STORING FLAMMABLES

Model No.	Test Lab	Description	No. of	Exterior Dim.	Approx.	Addn'l	Approx.
WMA112	FM*~	12 Gal. Self-Latch Standard 2-Door	1	18 x 43 x 18	163 lbs.	S2-05	12 lbs.
WMA312	FM*~	12 Gal. Self-Close, Self-Latch Safe-T-Door	1	20 x 43 x 18	183	S2-05	12
WMA118	FM*~	18 Gal. Self-Latch Standard 2-Door	1	24 x 43 x 18	190	S2-05	12
WMA318	FM*~	18 Gal. Self-Close, Self-Latch Safe-T-Door	1	26 x 43 x 18	210	S2-05	12
WMA124	FM*~	24 Gal. Self-Latch Standard 2-Door	5	44 x 43 x 12	227	WMS5-05	8
WMA324	FM*~	24 Gal. Self-Close, Self-Latch Safe-T-Door	5	46 x 43 x 12	235	WMS5-05	8

Model #WMA118
24"H x 43"W x 18"D

CABINET SPARE PARTS & ACCESSORIES

Model No.	Description	Approx. Shp. Wt.	Model No.	Description	Approx. Shp. Wt.
500	Wall Mount Bracket	12 lbs.	550	Stacking Bracket	6 lbs.



Model # 550
Stacking Bracket is made from stainless steel and comes 2 per cabinet

* Complies with OSHA Regulations FM Factory Mutual Tested and Approved
~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

★ Best Seller

Aluminum LP/Oxygen Gas Cylinder Storage



Interior racking system for horizontal cylinder storage



★ Model #LP4
33"H x 30"W x 32"D

Non-sparking Aluminum Gas Cylinder Cabinets provide significant advantages over conventional painted steel models. Designed for outdoor storage using .125" thick aluminum construction, these heavy gauge cabinets will resist weathering and won't corrode or discolor. All-welded 12-gauge aluminum construction features expanded metal sides and doors. Welded padlock hasp is standard for controlled access. Just 1/3 the weight of painted steel units, SECURALL® aluminum models offer real savings on shipping charges. Models ship fully assembled and ready to use. Labels ship unattached to storage unit for individual placement depending on product application (as shown at the left).

* Full and Empty Cylinder labels sold separately.

OSHA Compliant



Model #OG20
65"H x 60"W x 32"D

CABINETS FOR STORING LP AND OXYGEN GAS CYLINDERS

Model No.	Test Lab Approv.	Description	No. of Racks	Capacity	Exterior Dim.	Approx. Ship Wt.
LP2 ★	*	2 Cyl. Vertical Standard Door	-	(2) 20 lb. Cylinders	28 x 31 x 16	64 lbs.
LP4	*	4 Cyl. Horizontal Standard Door	2	(4) 20 or 33 lb. Cylinders	33 x 30 x 32	76
LP6	*	6 Cyl. Horizontal Standard Door	2	(6) 20 or 33 lb. Cylinders	33 x 43 x 32	87
LP8	*	8 Cyl. Horizontal Standard Door	4	(8) 20 or 33 lb. Cylinders	65 x 30 x 32	117
LP12	*	12 Cyl. Horizontal Standard 2-Door	4	(12) 20 or 33 lb. Cylinders	65 x 43 x 32	126
LP16	*	16 Cyl. Horizontal Standard 2-Door	4	(16) 20 or 33 lb. Cylinders	65 x 60 x 32	204
OG10	*	5-10 Cyl. Vertical Standard Door	-	Oxygen, Gas Cylinders	65 x 30 x 32	130
OG20	*	10-20 Cyl. Vertical Standard 2-Door	-	Oxygen, Gas Cylinders	65 x 60 x 32	177

All Models also available in Painted Steel! Call 888-326-7890

Aluminum Vertical LP Storage



★ Model #LPOG
65"H x 60"W x 32"D

All LP units are available in **Vertical Storage Models** at no additional charge. Simply add the suffix VERTICAL to your PO! Vertical LP Storage Units comply with **CSAB 149.2, Canadian Standard for Liquid Propane Storage**.

SECURALL® also offers a comprehensive LP/OG Cylinder Storage Unit that allows for the storage of both horizontal AND vertical cylinders in a combination unit. Combo Unit can store up to 8 cylinders on reinforced 12-gauge aluminum racks or shelves, and up to 10 cylinders vertically. Made of the same high grade .125" thick aluminum and all-welded construction.

* Full and Empty Cylinder labels sold separately.

OSHA Compliant



Model #LP8-VERTICAL
65"H x 30"W x 32"D

CABINETS FOR STORING LP AND OXYGEN CYLINDERS VERTICALLY

Model No.	Test Lab Approv.	Description	No. of Shelves	Capacity	Exterior Dim.	Approx. Ship Wt.
LP4-VERTICAL	*	4 Cyl. Vertical Standard Door	1	(4) 20 or 33 lb. Cylinders	33 x 30 x 32	86 lbs.
LP6-VERTICAL	*	6 Cyl. Vertical Standard Door	1	(6) 20 or 33 lb. Cylinders	33 x 43 x 32	97
LP8-VERTICAL	*	8 Cyl. Vertical Standard Door	2	(8) 20 or 33 lb. Cylinders	65 x 30 x 32	137
LP12-VERTICAL	*	12 Cyl. Vertical Standard 2-Door	2	(12) 20 or 33 lb. Cylinders	65 x 43 x 32	146
LP16-VERTICAL	*	16 Cyl. Vertical Standard 2-Door	2	(16) 20 or 33 lb. Cylinders	65 x 60 x 32	224
LPOG ★	*	8 Cyl. Horizontal Storage, 10 Cyl. Vertical Storage	2	(8) 20 or 33 lb. Cylinders	65 x 60 x 32	225

All Models also available in Painted Steel! Call 888-326-7890

Medical Gas Storage Cabinets

Store your portable medical gas cylinders safely and in compliance with OSHA requirements. Securall Oxygen Cylinder Storage Cabinets are designed to meet storage requirements for portable medical oxygen systems as set forth in:



Model MG121
(Shown with optional
caster assembly - CA18-SG)

NFPA Code 99 - Health Care Facilities - 1999 Edition
NFPA Code 101 - Life Safety - 2000 Edition
NFPA Code 30 - Flammable and Combustible Liquids - 2003 Edition
OSHA Regulations



These lockable storage cabinets limit access to authorized personnel, protecting cylinders from theft, damage, or tampering. The heavy-gauge, double-walled construction shields your cylinders from heat, sparks and flame, while separating them from flammable and combustible materials. Designed for D- and E-size cylinders up to 33-3/4" long x 4-1/4" diameter.

CABINETS FOR STORING OXYGEN CYLINDERS

Model No.	Door Style	Cylinder Size	Cylinder Capacity	Dimensions HxWxD	Shipping Weight
MG102	Manual	D, E	1-2	44" x 14" x 9"	97 lbs.
MG102FL	Manual	D, E	1-2	44" x 14" x 9"	112
MG104	Manual	D, E	2-4	44" x 14" x 13 5/8"	115
MG104FL	Manual	D, E	2-4	44" x 14" x 13 5/8"	135
MG304	Safe-T-Door	D, E	2-4	44" x 14" x 13 5/8"	125
MG304FL	Safe-T-Door	D, E	2-4	44" x 14" x 13 5/8"	145
MG109	Manual	D, E	9-12	44" x 23" x 18"	170
MG109FL	Manual	D, E	9-12	44" x 23" x 18"	199
MG309 *	Safe-T-Door	D, E	9-12	46" x 23" x 18"	180
MG309FL	Safe-T-Door	D, E	9-12	46" x 23" x 18"	209
MG309TL	Top Load, Safe-T-Door	D, E	9-12	40" x 23" x 18"	160
MG309TLFL	Top Load, Safe-T-Door	D, E	9-12	40" x 23" x 18"	185
MG121	Manual	D, E	21-24	44" x 43" x 18"	265
MG121FL	Manual	D, E	21-24	44" x 43" x 18"	308
MG321	Safe-T-Door	D, E	21-24	40" x 43" x 18"	280
MG321FL	Safe-T-Door	D, E	21-24	46" x 43" x 18"	323
MG321TL	Top Load, Safe -T- Door	D, E	21-24	40" x 43" x 18"	259
MG321TLFL	Top Load, Safe-T-Door	D, E	21-24	40" x 43" x 18"	297
MG106H	Manual	H	6-9	65" x 34" x 34"	372
MG106HFL	Manual	H	6-9	65" x 34" x 34"	436
MG306H	Safe-T-Door	H	6-9	67" x 34" x 34"	394
MG306HFL	Safe-T-Door	H	6-9	67" x 34" x 34"	458
MG109H	Manual	H	9-12	65" x 43" x 34"	443
MG109HFL	Manual	H	9-12	65" x 43" x 34"	520
MG309H	Safe-T-Door	H	9-12	67" x 43" x 34"	550
MG309HFL	Safe-T-Door	H	9-12	67" x 43" x 34"	550
CA18-MGREEN	Caster for 18"D Cabinet		2 Swivel, 2 Locking rigid casters		30 lbs.
CA34-MGREEN	Caster for 34"D Cabinet		2 Swivel, 2 Locking rigid casters		35
MOD	Digital Keypad Lock		(Added upcharge)		5



Model MG109TL

Model Mg121

Cabinet Features



Flush Mounted Handle with
Optional Digital Combination Lock



3-Point, Button
Latch Closure



Non Sparking
Aluminum Dividers Hold
Cylinders Upright

Outdoor Weatherproof Flammable Storage



Model #A160WP1
69"H x 31"W x 31"D

SECURALL® Weatherproof cabinets offer the same dependable storage for flammables and combustibles as our standard safety cabinet line with added protection from the elements.


Double-wall cabinets are all-welded with 18-gauge construction using galvanized steel and painted with a weather-resistant, urethane finish that is also resistant to ultra-violet rays. All cabinets feature a sloped roof with a 2³/₄" overhang and interior & exterior astragals that prevent rain penetration, while the flush-mounted stainless steel locking handle resists corrosion. Easily move these cabinets to the appropriate work location using built-in heavy gauge fork lift channels, and then secure them with fully-welded 7-gauge Bolt-Down Brackets with 7/8" diameter opening.

Available in 30, 45, 60 & 90-gallon capacities with manual and self-closing door styles. Self-closing Safe-T-Doors have fusible links that melt at 165°F allowing the doors to automatically close and latch. Standard color is Yellow.

Cabinets meet NFPA 40 CFR 264, 265, NFPA Code 30 & OSHA 1910 requirements.



Model #A130WP1
48"H x 43"W x 18"D



Model #881
High Security Hasp



Model #A130WP1MOD
48"H x 43"W x 18"D
shown with
High Security Handle

Cabinet Features



Sloped Roof
with 2³/₄"
Overhang




Stainless Steel
Flush-Mounted
Handle



Fork Lift
Channels w/
Bolt-Down Bracket



3-Point, Non-
Sparking, Self-
Latching Closure



Astragals On
Inside and
Outside Of Doors

CABINETS FOR STORING FLAMMABLES OUTDOORS

Model No.	Test Lab Approv.	Description	No. of Shelves	Exterior Dim.	Approx. Ship Wt.	Addn'l Shelf	Approx. Ship Wt.
A130WP1	*~	30 Gal. Weatherproof, Manual 2-Door	1	48 x 43 x 18	282 lbs.	S2-05	12 lbs.
A330WP1	*~	30 Gal. Weatherproof, Self-Close, Self-Latch Safe-T-Door	1	50 x 43 x 18	302	S2-05	12
A145WP1	*~	45 Gal. Weatherproof, Manual 2-Door	2	69 x 43 x 18	372	S2-05	12
A345WP1	*~	45 Gal. Weatherproof, Self-Close, Self-Latch Safe-T-Door	2	71 x 43 x 18	392	S2-05	12
A160WP1	*~	60 Gal. Weatherproof, Manual 2-Door	2	69 x 31 x 31	423	S3-05	17
A360WP1	*~	60 Gal. Weatherproof, Self-Close, Self-Latch Safe-T-Door	2	71 x 31 x 31	445	S3-05	17
A190WP1	*~	90 Gal. Weatherproof, Manual 2-Door	2	69 x 43 x 31	503	S4-05	21
A390WP1	*~	90 Gal. Weatherproof, Self-Close, Self-Latch Safe-T-Door	2	71 x 43 x 31	532	S4-05	21
881		High Security Handle with Hasp			2		

* Complies with OSHA Regulations

FM Factory Mutual Tested and Approved

~ Designed in Accordance with Specifications set forth by the National Fire Protection Association



Industrial/Commercial Storage



Model #SS184
84"H x 36" W x 18"D



Model #SS172
72"H x 36"W x 18"D

Organize, store and protect your valuable tools and materials with SECURALL® Industrial/Commercial storage cabinets.

- 18-gauge all-welded extra strength construction throughout.
- 18-gauge steel double wall doors.
- Each 18-gauge galvanized steel shelf can hold up to 500 lbs and is easily adjustable on 5" centers.
- 3-point self-latching doors have double wall construction.
- Full-length piano hinges and a lockable flush mounted door handle for obstruction free, fingertip operation.
- Shipped fully assembled and ready to use.
- Standard colors Beige or Gray (Additional colors available).


CABINETS FOR STORING INDUSTRIAL/COMMERCIAL SUPPLIES

Model No.	Description	No. of Shelves	Exterior Dim.	Approx. Ship Wt.	Addtn'l Shelf	Approx. Ship Wt.
SS142	Self-Latch Standard 2-Door	2	42 x 36 x 18	151 lbs.	SS-1-05	13 lbs.
SS172	Self-Latch Standard 2-Door	4	72 x 36 x 18	264	SS-1-05	13
SS184	Self-Latch Standard 2-Door	4	84 x 36 x 18	300	SS-1-05	13
SS242	Self-Latch Standard 2-Door	2	42 x 36 x 24	200	SS-2-05	17
SS272	Self-Latch Standard 2-Door	4	72 x 36 x 24	353	SS-2-05	17
SS284	Self-Latch Standard 2-Door	4	84 x 36 x 24	401	SS-2-05	17
SW242	Self-Latch Standard 2-Door / Counter High Mobile	2	47 x 36 x 24	200	SS-2-05	17

Cabinet Features



18-Ga. Double Wall Doors




16-Ga. Welded Shelf Supports



Flush Mounted Door Handles



3-point Self-Latching Doors



18-Ga. Galvanized Adjustable Shelves

Mobile Storage Cabinet



Model #SW242
47"H x 36"W x 24"D

Mobile Storage Cabinet Model comes equipped with two rigid and two swivel 4" locking casters (*factory installed*) and a sturdy push handle for easy mobility.

CABINETS FOR STORING INDUSTRIAL/COMMERCIAL SUPPLIES

Model No.	Description	No. of	Exterior Dim.	Approx.	Addtn'l	Approx.
SW242	Self-Latch Standard 2-Door / Counter High Mobile	2	47 x 36 x 24	200 lbs.	SS-2-05	17 lbs.

Stainless Steel Storage

STAINLESS STEEL SAFETY CABINETS FOR FLAMMABLE AND COMBUSTIBLE LIQUIDS



All The same features as a standard safety cabinet in Stainless Steel.

- Perfect for Controlled Environments and Clean room applications such as Hospitals and Laboratories.
- Durable, 18-gauge stainless steel cabinets offer *Extra Strength From Superior Design & Workmanship*.
- All-welded cabinets feature double-wall construction with 1 1/2" insulating airspace.
- 18-gauge stainless steel shelves are adjustable.
- Stainless steel vents feature a 2" opening in both interior and exterior walls.
- 2" leak-proof sill contains accidental spills.
- Flush-mounted stainless steel locking door handle eliminates projecting obstacles.
- Cabinets come equipped with four adjustable, stainless steel legs and heavy gauge, stainless steel piano hinges.

All cabinets Meet OSHA and NFPA Code 30 regulations.
All Cabinet Models Listed are FM Approved.



Model #A130-SS
44"H x 43"W x 18"D

Model #A331
37"H x 36"W x 24"D



STAINLESS STEEL CABINETS FOR STORING FLAMMABLES


Model No.	Test Lab	Description	No. of	Exterior Dim.	Approx.	Addn'l	Approx.
A105-SS	FM*~	12 Gal. Self-Latch, Standard Door	1	35 x 24 x 18	185 lbs.	S1-SS-05	5 lbs.
A305-SS	FM*~	12 Gal. Self-Close, Self-Latch, Safe-T-Door	1	37 x 24 x 18	195	S1-SS-05	5
A110-SS	FM*~	16 Gal. Self-Latch, Standard Door	1	44 x 24 x 18	217	S1-SS-05	5
A310-SS	FM*~	16 Gal. Self-Close, Self-Latch, Safe-T-Door	1	46 x 24 x 18	227	S1-SS-05	5
A131-SS	FM*~	30 Gal. Self-Latch, Standard, 2-Door	1	35 x 36 x 24	291	S15-SS-05	13
A331-SS	FM*~	30 Gal. Self-Close, Self-Latch, Safe-T-Door	1	37 x 36 x 24	306	S15-SS-05	13
A130-SS	FM*~	30 Gal. Self-Latch, Standard, 2-Door	1	44 x 43 x 18	325	S2-SS-05	12
A330-SS	FM*~	30 Gal. Self-Close, Self-Latch, Safe-T-Door	1	46 x 43 x 18	345	S2-SS-05	12
A145-SS	FM*~	45 Gal. Self-Latch, Standard, 2-Door	2	65 x 43 x 18	445	S2-SS-05	12
A345-SS	FM*~	45 Gal. Self-Close, Self-Latch, Safe-T-Door	2	67 x 43 x 18	465	S2-SS-05	12
A160-SS	FM*~	60 Gal. Self-Latch, Standard, 2-Door	2	65 x 31 x 31	533	S3-SS-05	17
A360-SS	FM*~	60 Gal. Self-Close, Self-Latch, Safe-T-Door	2	67 x 31 x 31	555	S3-SS-05	17

Custom Sizes and Tops are available for Cleanroom application-call 888-326-7890

Cabinet Features



2" Stainless Steel Vent / flash arrestor Bung Plug



Stainless Steel flush-mount Paddle Handle



3-Point self-Latching, Spring-Operated Button Latches

* Complies with OSHA Regulations
~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

FM Factory Mutual Tested and Approved



High Security Storage



Key-lock Entry



High Security Medeco Lock



3-point Security Steel rod closure

When you have a need for additional security these cabinets are designed to accommodate and protect your valuables, dangerous chemicals, and/or other items from unauthorized use, fire and theft. Also ideal for office use. Cabinets constructed of heavy 18-gauge steel, double-walled with 1 1/2" air space throughout. Double swinging doors have plug welded full-length piano hinges. Equipped with 18-gauge galvanized steel shelving and Medeco high security pick resistant lock recessed into door to prevent breaking with a hammer or cutting chisel. Standard colors are Beige and Gray. *(Certain chemicals may require labeling. Labeling available upon request)*



Model #S5001
65"H x 34"W x 18"D



Model #H007
65"H x 34"W x 18"D

CABINETS FOR STORING HIGH SECURITY ITEMS

Model No.	Test Lab	Description	No. of	Exterior Dim.	Approx.	Addn'l	Approx.
H007	*~	18 gauge, 200 lb shelf capacity	4	65 x 34 x 18	303 lbs.	H7-05	15 lbs.
S5001	*~	18 gauge, 200 lb shelf capacity, Carpet-lined shelves.	4	65 x 34 x 18	303	S0501-05	17


Model #GR10
65"H x 34"W x 18"D
shown in Charcoal Gray

High Security Weapons Storage



Programmable LaGard Electronic Keypad Lock

When you have a need for additional firearm security, these cabinets will accommodate and protect your weapons from unauthorized use and theft. Cabinets are constructed of heavy 18-gauge steel with 1 1/2" air space throughout, double wall construction, and aesthetically pleasing radial corner edging. Two-door design provides for safe and easy access by eliminating the problems of obstructed aisles, cabinet instability and tipping associated with large single door units. All models equipped with a Group I Rated manipulation-proof LaGard Electronic Combination Lock. Its fully programmable smooth touch keypad and Brass Plated "Lever" handle allow you quick access to your valuables. Shelves are 18-gauge galvanized steel and lined with fire retardant carpeting. Painted in High Gloss Metallic polyurethane and available in Charcoal Gray, Black, Hunter Green and Burgundy. Custom colors available. Carpet lining available in Gray or Beige.

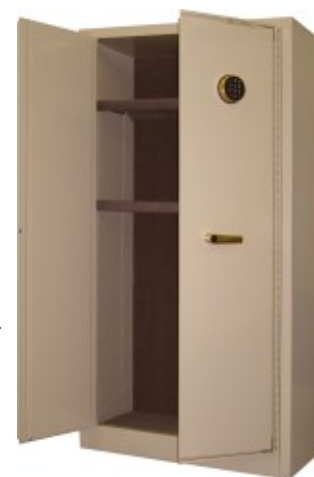

Model #GR12
65"H x 34"W x 18"D
shown in Beige

CABINETS FOR STORING HIGH SECURITY ITEMS

Model No.	Description	No. of	Exterior Dim.	Approx.	Addn'l	Approx.
HR007	200 lb shelf capacity	4	65 x 34 x 18	303 lbs.	H7-05	17 lbs.
SR001	200 lb shelf capacity, Carpet-lined shelves.	4	65 x 34 x 18	303	S0501-05	15
GR10	200 lb shelf capacity, Carpet-lined shelf, 10 Gun Capacity	1	65 x 34 x 18	303	S0501-05	17
GR12	200 lb shelf capacity, Carpet-lined shelf, 12 Gun Capacity	1	65 x 34 x 18	303	S0501-05	17
GR24	200 lb shelf capacity, Carpet-lined shelf, 24 Gun	1	65 x 34 x 18	303	S0501-05	17



Gun Racking is carpet-lined with diamond cut-outs for barrel of rifle

Colors Available

EXTERIOR



INTERIOR



Fire Insulation Upgrades

FI – Fire Protection Package Upgrade your High Security or Gun Cabinet with a Fire Insulation Package! Sidewalls, back, doors and roof are lined with 3/4" Gypsum Panel Drywall between interior and exterior panels, creating a fire protection barrier. Factory Installed. Approx Ship wt. 150 lbs.

Firearm & Security Safes



Group 1 Rated LaGard Manipulation Proof Electronic Combination Lock

Protect your fire arms from unwanted theft, damage, or unauthorized use. SECURALL Firearm & Security Safes offer a number of features unique to the industry. Outer body is constructed of 12-gauge cold rolled steel; inner body constructed of 3/16" structural steel plating. Doors feature 2" Chrome Plated Steel Locking Bolts, and electronic locking mechanism. Entire unit is continuously welded for ultimate security.

Model #4612-FRS
60"H x 34"W x 20"D



Model #3102
60"H x 22"W x 20"D



SERIES 4000 SAFES - Security Rated & Fire Lined

Model	Door Style	Interior Configuration	Fire Rating Omega Listed	Exterior Dim. (H" x W" x D")	Approx. Ship Wt.
4001-FRS	1	1 Shelf Only	1700°F -1 hr	30 x 22 x 20	468 lbs.
4102-FRS	1	2 Shelves Only	1700°F -1 hr	60 x 22 x 20	872
4114-FRS	1	14 Gun Capacity	1700°F -1 hr	60 x 22 x 20	869
4203-FRS	1	3 Shelves Only	1700°F -1 hr	72 x 22 x 23	1,070
4210-FRS	1	10 Gun Capacity	1700°F -1 hr	72 x 22 x 23	1,087
4214-FRS	1	14 Gun Capacity	1700°F -1 hr	72 x 22 x 23	1,061
4802-FRS	1	2 Shelves Only	1700°F -1 hr	60 x 29 x 27	1,136
4815-FRS	1	15 Gun Capacity	1700°F -1 hr	60 x 29 x 27	1,167
4820-FRS	1	15 Capacity/5 Gun	1700°F -1 hr	60 x 29 x 27	1,189
4830-FRS	1	30 Gun Capacity	1700°F -1 hr	60 x 29 x 27	1,134
4602-FRS	2	2 Shelves Only	1700°F -1 hr	60 x 34 x 20	1,311
4612-FRS	2	12 Gun Capacity	1700°F -1 hr	60 x 34 x 20	1,325
4624-FRS	2	24 Gun Capacity	1700°F -1 hr	60 x 34 x 20	1,300
4902-FRS	2	2 Shelves Only	1700°F -1 hr	60 x 34 x 36	1,494
4930-FRS	2	30 Gun Capacity	1700°F -1 hr	60 x 34 x 36	1,559
4942-FRS	2	42 Gun Capacity	1700°F -1 hr	60 x 34 x 36	1,524
4303-FRS	2	3 Shelves Only	1700°F -1 hr	72 x 34 x 20	1,518
4312-FRS	2	12 Gun Capacity	1700°F -1 hr	72 x 34 x 20	1,535
4324-FRS	2	24 Gun Capacity	1700°F -1 hr	72 x 34 x 20	1,508
4403-FRS	2	3 Shelves Only	1700°F -1 hr	72 x 34 x 36	1,825
4430-FRS	2	30 Gun Capacity	1700°F -1 hr	72 x 34 x 36	1,880
4442-FRS	2	42 Gun Capacity	1700°F -1 hr	72 x 34 x 36	1,817

Safe Features

DOUBLE-BODY CONSTRUCTION

Safes are manufactured utilizing two separate interlocking bodies. With a separate continuously welded steel outer body and a welded inner body, this product provides you with twice the protection of standard safes.

DRYSTONE CAST INSULATION

Drystone insulation barrier is poured and hardened between all sections of the outer and inner safe bodies. This feature affords fire protection for your valuables, creating a 1700°F/1 hour fire-rating.

TWO DOOR ACCESS

The two door design on maximum capacity safes provides easy access for larger units. Utilization of both doors eliminates the problem of obstructed aisles, safe instability and tipping associated with large single door safes.

ELECTRONIC LOCK

All safes come standard with a Group 1 Rated Manipulation Proof Electronic Combination



Series 4000 safes are listed in Omega Point Laboratories Product Directory as FRS (Fire Rated Safes).



All models meet UL's aggressive testing, approval and listing standards as Residential Security Containers.

SERIES 3000 - Security Rated & Fire Lined


Model	Door Style	Interior Configuration	Fire Lining	Exterior Dim. (H" x W" x D")	Approx. Ship Wt.
3102	1	2 Shelves Only	5/8" Fire Liner	60 x 22 x 20	447 lbs.
3114	1	14 Gun Capacity	5/8" Fire Liner	60 x 22 x 20	443
3203	1	3 Shelves Only	5/8" Fire Liner	72 x 22 x 23	560
3214	1	14 Gun Capacity	5/8" Fire Liner	72 x 22 x 23	554
3802	1	2 Shelves Only	5/8" Fire Liner	60 x 29 x 27	719
3815	1	15 Gun Capacity	5/8" Fire Liner	60 x 29 x 27	750
3830	1	30 Gun Capacity	5/8" Fire Liner	60 x 29 x 27	707
3602	2	2 Shelves Only	5/8" Fire Liner	60 x 34 x 20	703
3612	2	12 Gun Capacity	5/8" Fire Liner	60 x 34 x 20	711
3624	2	24 Gun Capacity	5/8" Fire Liner	60 x 34 x 20	700
3312	2	12 Gun Capacity	5/8" Fire Liner	72 x 34 x 20	807
3324	2	24 Gun Capacity	5/8" Fire Liner	72 x 34 x 20	776

Colors Available

EXTERIOR



INTERIOR



* Complies with OSHA Regulations

FM Factory Mutual Tested and Approved

~ Designed in Accordance with Specifications set forth by the National Fire Protection Association




Customize to suit your needs

Custom Wire Glass



Custom sized cabinets are available in Galvannealed and Stainless Steel. Create any configuration 14”H x 12”W x 12”D or larger! 14” H minimum for paddle handle. Please provide dimensions and desired cabinet specifications to one of our Sales Representatives. Prices quoted on request.

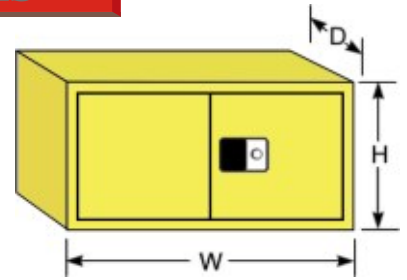

Custom Forklift Channels



Custom Electrical Containment

CUSTOM STORAGE


Choose from Options such as:

- Cabinet Color
 - Dimensions
 - Sump capacity
 - Sump Liners
 - Handle Type
 - Number of Doors
 - Door Closing Type
 - Dual Access
 - Number of Shelves
 - Shelf Capacity
 - Shelf Lining
 - Poly Trays
 - Labels
 - Tray Top
 - Wall Mount
 - Anchoring Brackets
 - Kick Recess
 - Leveling Legs
 - Forklift Channels
 - Casters
 - Stainless Steel
 - High Security Lock
 - Ventilation
 - Ground
 - Weatherproof Package
- Or whatever else you might need.



Custom Separation Walls & Shelvings

Speak to one of our Technical Sales Representatives for storage requirements and approved capacities.
Call **888-326-7890** or visit us on the web at www.securallproducts.com and fill out a custom cabinet quote form!

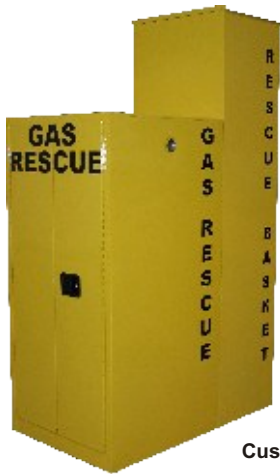

Custom Designed



Lock out Tag out



Custom Door Option



Custom side by Side Cabinet



Custom MedGas Cabinet



Custom LP Cabinet with Top Loading option

HazMat Chemical Storage

Hazmat Chemical Storage

Natural Convection Air Vents
(OSHA, FM 6049, IBC)

Explosion Relief Panel(s)
(IBC, FM, NFPA)

Static Ground Connection Inside and Out
(FM, OSHA, NFPA)

Forklift Channels with Anchoring Brackets
(EPA, to lift off ground & Allow for visual inspection of Sump area, IBC)



Chemical / Corrosive / Ultraviolet Resistant Paint

NFPA 704 Warning Label for Hazard Rating System with Placard Holder and Protective Shield
(FM, OSHA, NFPA)

Removable Galvanized Steel Safety Floor Planking
(250lb FM Requirement, OSHA 1910, IBC)

Leak-tight, Continuously Welded Sump Meets EPA and OSHA Requirements for Secondary Containment
(EPA, NFPA, OSHA, FM, IBC)

Reflective Warning Tape Marking Entry (OSHA, IBC) **Heavy Gauge Aluminum Threshold**

Specifically designed for outdoor storage and dispensing from 55-gallon drums containing flammable or combustible liquids. Outer wall is constructed of welded 16 or 12-gauge steel. Inner wall is constructed of 20-gauge steel. Outdoor storage buildings are engineered with 3" airspace throughout and come standard with a commercial grade lockset handle. All models are designed in accordance with the standards set forth by NFPA Code 30 and comply with OSHA and EPA regulations. All models are FM Approved for the storing and dispensing of flammable and combustible liquids. Standard color is Gray.



Model #B200X
85"H x 60"W x 42"D



★ **Model #B1600XFR2**
102"H x 120"W x 96"D
shown with options and ramp

Lockers and Buildings are available with a 2-hour and 4-hour fire rating. Chemical Storage Units located within 10 feet of a main building or property line require a **4-hour fire rating**. Units located more than 10 feet and less than 50 feet from a main building or property require a **2-hour fire rating**. Units located more than 75 feet from a main building or property line require no fire rating (*Check with local authorities*).

LOCKERS/BUILDINGS FOR STORING 55-GALLON DRUMS - outdoor and indoor application


Non-Rated						Two-Hour Fire Rated (Walls 2hrs, Roof 1hr)		Four-Hour Fire Rated (Walls 4hrs, Roof 3hrs)		
Model No.	Test Lab Approv.	Drum Capacity	Sump Capacity	Exterior Dim. H" x W" x D"		Approx. Ship Wt.	Model No.	Approx. Ship Wt.	Model No.	Approx. Ship Wt.
B200X	FM*~	2 55-Gal. Drums	49 Gal.	85	60 42	1,281 lbs.	B200XFR2	1,730 lbs.	B200XFR4	2,108 lbs.
B400X	FM*~	4 55-Gal. Drums	77	85	60 60	1,748	B400XFR2	2,038	B400XFR4	2,427
B600X	FM*~	6 55-Gal. Drums	114	102	84 60	2,061	B600XFR2	2,528	B600XFR4	3,005
B900X	FM*~	9 55-Gal. Drums	168	102	84 84	2,567	B900XFR2	2,590	B900XFR4	3,722
B1200X	FM*~	12 55-Gal. Drums	222	102	84 108	3,200	B1200XFR2	3,878	B1200XFR4	4,532
★ B1600X	★ FM*~	16 55-Gal. Drums	289	102	120 96	5,515	★ B1600XFR2	5,825	★ B1600XFR4	6,842
★ B2400X	★ FM*~	24 55-Gal. Drums	415	102	168 96	6,994	★ B2400XFR2	7,340	★ B2400XFR4	8,667
★ B3200X	★ FM*~	32 55-Gal. Drums	541	102	216 96	8,652	★ B3200XFR2	9,212	★ B3200XFR4	10,850
★ B4800X	★ FM*~	48 55-Gal. Drums	792	102	312 96	9,963	★ B4800XFR2	12,222	★ B4800XFR4	14,481
★ B6400X	★ FM*~	64 55-Gal. Drums	1,044	102	408 96	12,851	★ B6400XFR2	15,731	★ B6400XFR4	19,611
★ B8000X	★ FM*~	80 55-Gal. Drums	1,034	102	504 96	15,369	★ B8000XFR2	18,870	★ B8000XFR4	22,371

*Sizes 1600 and larger are constructed of 12-gauge Galvannealed Steel

CUSTOM & SPECIAL OPTIONS call 888-326-7890 or Email



Fire Suppression System



Interior Shelving



Explosion Proof Lighting



Explosion Proof Heater



Explosion proof Air Conditioner

* Complies with OSHA Regulations FM Factory Mutual Tested and Approved
~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

★ **Best Seller!**

Agri-Chemical Storage

SECURALL® offers a complete line of safety storage buildings specifically designed for storing agricultural chemicals and equipment safely. All buildings are designed to help you comply with safety rules when mixing and handling pesticides, herbicides, and other turf chemicals. These specially designed buildings are perfect for golf courses and nurseries.

SECURALL® Agri-Chemical Storage Buildings help reduce the risk of poisoning and injuries among pesticide handlers and agricultural employees and will also help you protect against chemical spills, child and animal poisonings, and loss due to theft, fire and unauthorized personnel.

Pesticide and Agri-Chemical Storage

- Natural Convection Air Vents (OSHA, FM 6049, IBC)
- R11 Fiberglass Insulation in Ceiling and Walls (IBC)
- Vapor-resistant Exterior Light with Photocell (UL, OSHA, IBC)
- Forklift Channels with Anchoring Brackets (EPA, to lift off ground & allow for visual inspection of sump area, IBC)
- Dust-proof, Fluorescent Interior Light with Weatherproof Switch (UL, OSHA, IBC)
- Removable Galvanized Steel Safety Floor Planking (2500 FM requirement, OSHA 1910, IBC)
- Leak-tight, Continuously Welded Sump Meets EPA and OSHA Requirements for Secondary Containment (EPA, NFPA, OSHA, FM, IBC)
- Chemical / Corrosive / Ultraviolet Resistant Paint
- Reflective Warning Tape Marking Entry (OSHA 1910, IBC)
- Heavy Gauge Aluminum Threshold (IBC)



Model #AG200
102"H x 168"W x 96"D

Agri-Chemical Lockers/Buildings are also available with 2 and 4-hour fire ratings. Fire-rating is dependant on the proximity of the location of your outdoor storage Locker/Building to any adjacent building or property line. Storage Units located within 10 feet of a main building or property line require a **4-hour fire rating**. Units located more than 10 feet and less than 50 feet from a main building or property line require a **2-hour fire rating**. Units located more than 75 feet from a main building or property line do not require a fire rating (*Check with your local authority having jurisdiction*).



Model #AG200
85"H x 60"W x 42"D

LOCKERS/BUILDINGS FOR STORING CHEMICALS - outdoor and indoor application


Model No.	Test Lab Approv.	Non-Rated				Two-Hour Fire Rated (Walls 2hrs, Roof 1hr)		Four-Hour Fire Rated (Walls 4hrs, Roof 3hrs)			
		Capacity	Sump Capacity	Exterior Dim. H" x W" x D"		Approx. Ship Wt.	Model No.	Approx. Ship Wt.	Model No.	Approx. Ship Wt.	
AG200	FM*~	68.4 Cubic Feet	49 Gal.	85	60	42	1,499 lbs.	AG200FR2	1,877 lbs.	AG200FR4	2,255 lbs.
AG400	FM*~	145.1 Cubic Feet	77	85	60	60	1,891	AG400FR2	2,280	AG400FR4	2,669
AG600	FM*~	211.4 Cubic Feet	114	102	84	60	2,331	AG600FR2	2,808	AG600FR4	3,285
AG900	FM*~	308.1 Cubic Feet	168	102	84	84	2,937	AG900FR2	3,503	AG900FR4	4,069
AG1200	FM*~	404.7 Cubic Feet	222	102	84	108	3,638	AG1200FR2	4,292	AG1200FR4	4,946
AG1600	FM*~	524.1 Cubic Feet	289	102	120	96	5,226	*AG1600FR2	6,243	*AG1600FR4	7,260
AG2400	FM~	747.7 Cubic Feet	415	102	168	96	6,443	*AG2400FR2	7,770	*AG2400FR4	9,097
AG3200	FM~	971.3 Cubic Feet	541	102	216	96	8,030	*AG3200FR2	9,668	*AG3200FR4	11,306
AG4800	FM~	1,418.5 Cubic Feet	792	102	312	96	10,566	*AG4800FR2	12,825	*AG4800FR4	15,084
AG6400	FM~	1,865.7 Cubic Feet	1,044	102	408	96	13,584	*AG6400FR2	16,464	*AG6400FR4	20,344
AG8000	FM~	2,313 Cubic Feet	1,034	102	504	96	15,301	*AG8000FR2	18,802	*AG8000FR4	22,303

*Sizes 1600 and larger are constructed of 12-gauge Galvannealed Steel


Building Standard Features

- All Agri-Chemical storage buildings come standard with 3 tier of shelving on 3 walls, Interior and Exterior lighting, a receptacle and load center
- AG200 has shelves on back wall only
AG400 thru AG8000 have shelves on sides & back
- AG2400 thru AG3200 have 2 Interior Lights
AG4800 thru AG8000 have 3 Interior Lights
- AG200 thru AG1200 have 16-ga. Galvannealed Steel exterior
AG1600 thru AG8000 have 12-ga. Galvannealed Steel exterior


Outdoor Storage - Buildings & Lockers




B200X




B400X

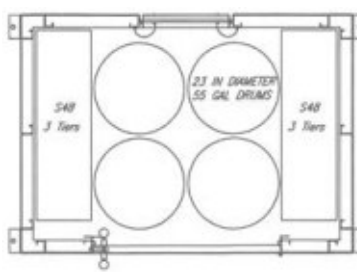


B600X




B900X




B1200X




B1600X

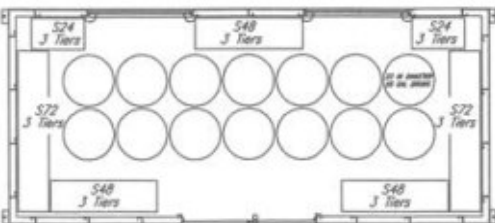


B3200X

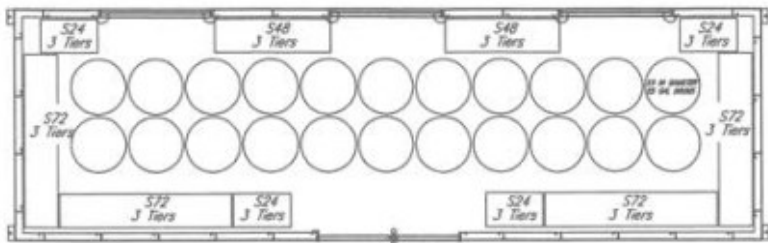

B4800X

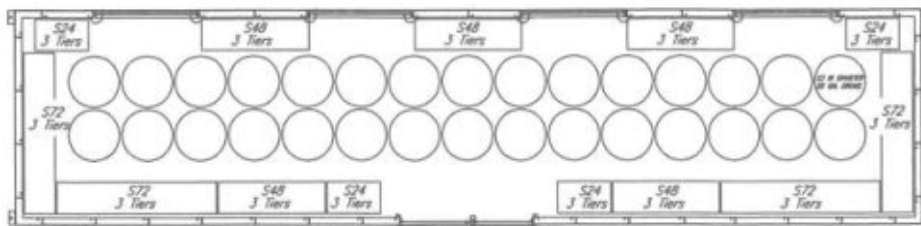

B6400X

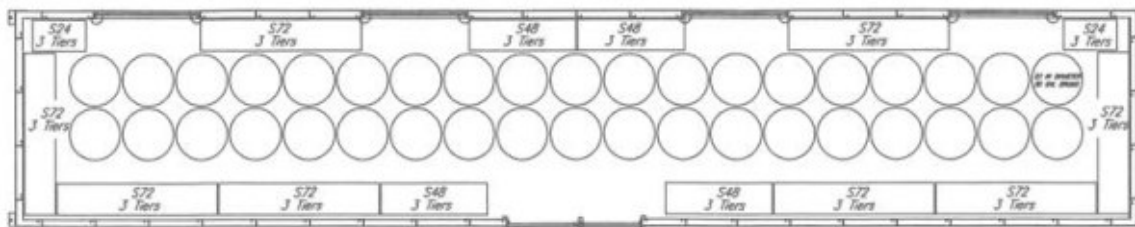

B8000X

TOP 10 LIST Why You Should Purchase A SECURALL HAZ-MAT Storage Building!

1. SECURALL Storage Lockers & Buildings have double-wall construction.
2. SECURALL Storage Lockers & Buildings have inter-locking exterior wall sections that provide superior structural strength over conventional stud systems.
3. SECURALL Storage Lockers & Buildings have exterior walls and roof of galvanneated steel with a top-coat of chemical resistant urethane paint.
4. SECURALL HazMat Storage Lockers & Buildings feature an explosion relief panel in rear wall and are rated for storage and dispensing of Class 1A and 1B liquids.
5. SECURALL Storage Lockers & Buildings project a vision of quality with special features such as: galvanized shelves, aluminum thresholds, vents and electrical.
6. SECURALL Storage Lockers & Buildings are FM Approved* and all electrical installations are UL Classified.
7. Custom sizes are available as well as 2 and 4-Hour Fire Ratings.
8. Short lead times on most standard buildings.
9. Personalized customer service. Deal directly with the Sales Department and Design Engineering staff.
10. SECURALL has been providing the marketplace with the highest quality Safety Storage Products since 1965.

★ Shelving available at additional charge.

* Complies with OSHA Regulations
 ~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

FM Factory Mutual Tested and Approved

Building Accessories



OP001 & OP002



OP007



OP0010



OP0013



OP0020

Explosion Proof Light

Option No.	Description	Applicable to building types:
OP 0001	Explosion-Proof Light w/ Switch (Interior)	B
OP 0001-A	Additional Explosion-Proof Light (Interior)	B
OP 0002	Explosion-Proof Light w/ Photocell (Exterior)	B
OP 0002W/01	Explosion-Proof Light w/ Photocell (Exterior in addition to Interior Light)	B
OP 0003	Dust/Vapor Resistant Light w/ Switch (Interior)	AG
OP 0003-F	Dust/Vapor Resistant Fluorescent Light w/ Switch (Interior)	AG
OP 0004	Dust/Vapor Resistant Light w/ Photocell (Exterior)	AG
OP 0005	Explosion-Proof Receptacle (Interior Only - NOT WEATHERPROOF)	B

Explosion Proof Heater

Option No.	Description	Applicable to building types:
OP 0006-6	Explosion-Proof Heater (6, 143 BTU)	B / AG
OP 0006-12	Explosion-Proof Heater (12,286 BTU)	B / AG
OP 0006-25	Explosion-Proof Heater (25,938 BTU)	B / AG
OP 0006-10FF	Explosion-Proof Heater, Fan Forced (10,000 BTU)	B / AG
OP 0006-25FF	Explosion-Proof Heater, Fan Forced (25,600 BTU)	B / AG
OP 0006-34FF	Explosion-Proof Heater, Fan Forced (34,100 BTU)	B / AG

Explosion Proof Air Conditioner

Option No.	Description	Applicable to building types:
OP 0007-14	Explosion-Proof Air Conditioner (14,000 BTU)	B / AG
OP 0007-19	Explosion-Proof Air Conditioner (19,000 BTU)	B / AG

Dry Chemical Fire Suppression System

Option No.	Description	Applicable to building types:
OP 0010	Dry Chemical Fire Suppression System (B200 - B1600)	B / AG
OP 0010	Dry Chemical Fire Suppression System (B2400 - B4800)	B / AG
OP 0010	Dry Chemical Fire Suppression System (B6400 - B8000)	B / AG
OP 0010D	Dry Chemical Fire Suppression System for Buildings 10' D or greater	B / AG
OP 0010-ACT	Dry Chemical System Activation	B / AG
OP 0010-T	Dry Chemical Alarm Tie-In	B / AG
OP 0010A	Dry Chemical Alarm	B / AG
OP 0010S	Dry Chemical Alarm w/ Strobe	B / AG


Explosion Proof & Industrial Exhaust

Option No.	Description	Applicable to building types:
OP 0013-343	Explosion-Proof Exhaust w/ Indicator Light (343 CFM)	B
OP 0013-388	Explosion-Proof Exhaust w/ Indicator Light (388 CFM)	B
OP 0013-600	Explosion-Proof Exhaust w/ Indicator Light (600 CFM)	B
OP 0013-900	Explosion-Proof Exhaust w/ Indicator Light (900 CFM)	B
OP 0013-A	Alarm for Explosion-Proof Exhaust	B
OP 0013-B	Break Glass for Explosion-Proof Exhaust	B
OP 0020	Industrial Exhaust	AG
OP 0020-1	Industrial Exhaust (1,000 CFM)	AG


Building Accessories



OP0022



OP0015



OP0009



OP0005



OP0051



OP0061

Personnel Single & Double Door

Option No.	Description	Applicable to building types:
OP0021-36	Personnel Door (36"W x 80"H)	B / AG
OP0021-48	Personnel Door (48"W x 80"H)	B / AG
OP0021-FR2	Additional Double Door - 2 hour fire rated (60"W x 80"H)	B / AG
OP0021-FR4	Additional Double Door - 4 hour fire rated (60"W x 80"H)	B / AG
OP0021-54	Additional Double Door - 1 ½ hour fire rated (54"W x 80"H)	B / AG
OP0021-72	Double Door - 1 ½ hour fire rated (72"W x 80"H)	B / AG
OP0021-108	Double Door (60"W x 108"H)	B / AG

Portable Eyewash Station & Shelves

Option No.	Description	Applicable to building types:
OP0025-6	Portable Eyewash Station (6 Gal.)	B / AG
OP0025-16	Portable Eyewash Station (16 Gal.)	B / AG
OP0022	Shelves, 14"W w/ 2" Lip Sides	B / AG
OP0022-16	Shelves, 16"W w/ 1" Lip Sides	B / AG
OP0022-25	Shelves, 25"W w/ 2" Lip Sides	B / AG
OP0022-WB	Workbench (1/8" Aluminum)	B / AG
OP0022-WBSS	Workbench (Stainless Steel)	B / AG
OP0022-LT	Shelves, 14" w/ 2" Lip Sides (Leak Tight)	B / AG


Sump Drain Pan

Option No.	Description	Applicable to building types:
OP0029	Sump Drain Pan w/ Lockable Valve, 2" NPT	B / AG
OP0029-1	Sump Drain Pan w/ Lockable Valve, 1" NPT	B / AG
OP0029-2.5	Sump Drain Pan w/ Lockable Valve, 1 ½" NPT	B / AG
OP0029-D-2	Sump Drain Pan only w/ 2" NPT	B / AG
OP0029-D-1	Sump Drain Pan only w/ 1" NPT	B / AG
OP0029-D-1.5	Sump Drain Pan only w/ 1 ½" NPT	B / AG

Miscellaneous

Option No.	Description	Applicable to building types:
OP0009	R-11 Insulation	B / AG
OP0024-F	Fiberglass Floor Grating	B / AG
OP0024-GS	Galvanized Steel Floor Grating	B / AG
OP0027-2	Bulkheads up to 2" Diameter O.D., Schedule 40	B / AG
OP0027-20	Bulkheads up to 20 x 12 Opening	B / AG
OP0028	Portable Fire Extinguisher	B / AG
OP0031	Primer Coat for Saltwater	B / AG
OP0033-I	Waterproof Recepticle (Interior)	AG
OP0033-E	Waterproof Recepticle (Exterior w/ Cover)	B / AG
OP0034-NR	Separation Wall/Sump Divider, 8ft Deep Bldg, Non-Fire Rated, Panel Construction	B / AG
OP0034-FR2	Separation Wall/Sump Divider, 8ft Deep, 2 Hr Fire Rated, UL-U425 Design	B / AG
OP0034-FR4	Separation Wall/Sump Divider, 8ft Deep, 4 Hr Fire Rated, UL-U490 Design	B / AG
OP0051	Skylights (1 for 3200 & smaller, 2 for 4800 & larger)	B / AG
OP0054	Flammables DOT Placard	B / AG
OP0055	Combustibles DOT Placard	B / AG
OP0061	Overhead Roll-Up Door	B / AG
OP0063	Ball Bearing Roller Option	B / AG
OP0071	Hurricane Proof Door Upgrade (80"H x 36"W)	B / AG
OP0072	Hurricane Proof Door Upgrade w/ Fire Rating (80"H x 36"W)	B / AG
OP0073	Hurricane Proof Door Upgrade w/ Fire Rating (60"H x 80"W)	B / AG

Building Ramps



Model #BR70
44"W x 88"L

Ramps are compatible with both Hazardous Chemical and Agri-Chemical Storage Lockers

Ramps for Outdoor Storage Lockers & Buildings

Model No.	Description	Exterior Dim. W" x L"	Approx. Ship Wt.
BR60	Steel Ramp w/ Skid-Resistant Finish	24 x 72	113 lbs.
BR60A	Aluminum Ramp w/ Skid-Resistant Finish	24 x 72	49
BR65	Steel Ramp w/ Skid-Resistant Finish	40 x 88	315
BR65A	Aluminum Ramp w/ Skid-Resistant Finish	40 x 88	130
BR70	Steel Ramp w/ Skid-Resistant Finish	44 x 88	325
BR75	Steel Ramp w/ Skid-Resistant Finish	48 x 88	335
BR80	Steel Ramp w/ Skid-Resistant Finish	52 x 72	331
BR90	Steel Ramp w/ Skid-Resistant Finish	60 x 72	343
BR95A	Aluminum Ramp w/ Skid-Resistant Finish	48 x 96	355


Heavy Duty Drum SpillStation

Built to provide a lifetime of service, these secondary containment drum stations provide an easy and safe solution to organizing hazardous waste in drums. Rugged all-welded 12-gauge galvanized steel offers long term use. Our SpillStations are specifically designed to be used as a holding area for drums, dispensing station or waste collection center. All units feature removable 1" galvanized steel planking and forklift channels for easy mobility.



Model #DSS04

Standard Capacities

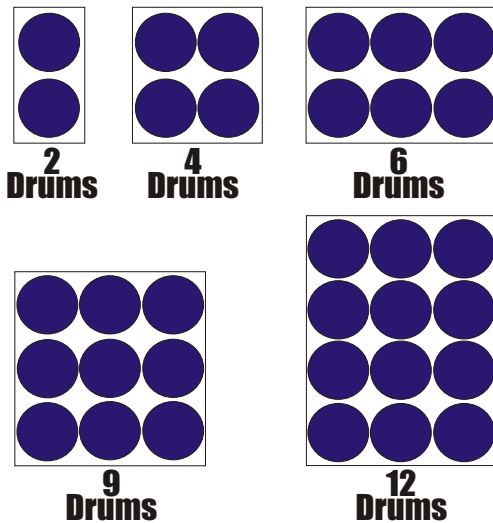

Standard Features

- 12-gauge galvanized steel design.
- All-welded construction.
- Complies with EPA Spill Containment Requirements (40CFR264.175).
- Corrosive/ultraviolet resistant acrylic urethane.
- 11,000Lb. load capacity handles any application.
- Choose from 5 configurations.
- 1" removable galvanized steel floor planking.
- Forklift channels for easy mobility.
- Use indoors and outdoors.
- Optional ramp.

Drum Spill Station

Model No.	Description	Sump Capacity Gallons	Dimensions (H x W x D)in.	Load Capacity	Shp. Wt. Lbs.
DSS02	Two Drum Unit	39	9¼ x 27¼ x 56	2,500 Lbs.	289 lbs.
DSS04	Four Drum Unit	74	9¼ x 51¼ x 56	5,000	430
DSS06	Six Drum Unit	109	9¼ x 75¼ x 56	6,600	516
DSS09	Nine Drum Unit	156	9¼ x 75¼ x 80	9,900	809
DSS12	Twelve Drum Unit	201	9¼ x 75¼ x 103	11,520	1,007
DSSR60	Ramp		9¼ x 24 x 72		113



Why it is Your Responsibility to Know your Cabinet is Compliant:

Public Law 91-596
84 STAT. 1590
91st Congress, S.2193
December 29, 1970,
as amended through January 1, 2004. (1)



An Act

To assure safe and healthful working conditions for working men and women; by authorizing enforcement of the standards developed under the Act; by assisting and encouraging the States in their efforts to assure safe and healthful working conditions; by providing for research, information, education, and training in the field of occupational safety and health; and for other purposes.

Be it enacted by the Senate and House of Representatives of the United States of America in Congress assembled, That this Act may be cited as the "Occupational Safety and Health Act of 1970."

SEC. 5. Duties

(a) Each employer --

- (1) shall furnish to each of his employees employment and a place of employment which are free from recognized hazards that are causing or are likely to cause death or serious physical harm to his employees;
- (2) shall comply with occupational safety and health standards promulgated under this Act.

29 USC 654

(b) Each employee shall comply with occupational safety and health standards and all rules, regulations, and orders issued pursuant to this Act which are applicable to his own actions and conduct.

SEC. 17. Penalties

(A) Any employer who willfully or repeatedly violates the requirements of section 5 of this Act, any standard, rule, or order promulgated pursuant to section 6 of this Act, or regulations prescribed pursuant to this Act, may be assessed a civil penalty of not more than \$70,000 for each violation, but not less than \$5,000 for each willful violation.

Flammable Storage Units are to be Used for the storage of:

OSHA 1910

106.8. Flammable liquid means any liquid having a flash point below 100°F (37.8°C) or higher, the total of which make up 99 percent or more of the total volume of the mixture. Flammable liquids shall be known as Class I liquids. Class I liquids are divided into three classes as follows:

Class IA shall include liquids having flash points below 73°F (22.8°C) and having a boiling point below 100°F (37.8°C).


Class IB shall include liquids having flash points below 73°F (22.8°C) and having a boiling point at or above 100°F (37.8°C).

NFPA Flammable and Combustible Classes		
Flammables	Flash Point	Boiling Point
Class IA	<73°F (22.8°C)	<100°F (37.8°C)
Class IB	<73°F (22.8°C)	≥100°F (37.8°C)
Class IC	≥73°F (22.8°C) and <100°F (37.8°C)	-
Combustibles		
Class II	≥100°F (37.8°C) and <140°F (60°C)	-
Class IIIA	≥140°F (60°C) and <200°F (93°C)	-
Class IIIB	≥200°F (93°C)	-

Based on NFPA Code 30

It should be mentioned that flash point was selected as the basis for classification of flammable and combustible liquids because it is directly related to a liquid's ability to generate vapor, i.e., its volatility. Since it is the vapor of the liquid, not the liquid itself, that burns, vapor generation becomes the primary factor in determining the fire hazard. The expression "low flash - high hazard" applies. Liquids having flash points below ambient storage temperatures generally display a rapid rate of flame spread over the surface of the liquid, since it is not necessary for the heat of the fire to expend its energy in heating the liquid to generate more vapor.

A Compliant Cabinet Must Have:

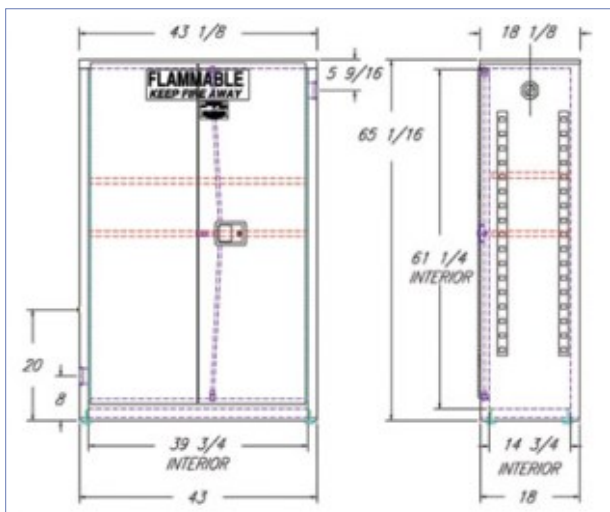

Required Features:

- Reinforced 18-gauge construction.
- Top, bottom, sides, back and doors - double wall construction with 1 ½" air space.
- Leak proof sill 2" deep.
- Two vents with flash arrestors.
- Non-sparking, 3-point self-latching doors.
- Adjustable leveling legs.
- Locking handle.
- Static grounding bolt OSHA compliant.
- Large Warning label.



18-gauge double wall construction & seamed joints

OSHA 1910

1910.106(d)(3)(ii)(a). The bottom, top, door, and sides of cabinet shall be at least No. 18-gauge sheet iron and double walled . . . Joints shall be riveted, welded or made tight by some equally effective means.

NFPA 30

6.3.3.2.a. The bottom, top, door, and sides of the cabinet shall be at least No. 18-gauge sheet steel

6.3.3.2.b. Joints shall be riveted, welded, or made tight by some equally effective means.

FM 6050

3.2.1. Cabinets shall be of double wall steel or single wall wood construction. . . Steel thickness shall not be less than 18-gauge Seams and joints shall be secured by riveting, welding, brazing, or some equally effective means.



1 1/2" airspace throughout cabinet body

OSHA 1910

1910.106(d)(3)(ii)(a). Metal cabinets constructed in the following manner shall be deemed to be in compliance. The bottom, top, door, and sides of cabinet shall be . . .double walled with 1 1/2 - inch air space.

NFPA 30

6.3.3.2.a. The bottom, top, door, and sides of the cabinet . . . shall be double-walled, with 38 mm (1 1/2 in.) air space.

FM 6050

3.2.1.A. Cabinets shall be of double wall steel. . . Walls, top, and door(s) shall have a gap of not less than 1 1/2 in. (38 mm) between the inner and outer panels. . . Nonflammable insulation may be placed within the gap.



Leak Proof Sill 2" Deep, Prevents Leakage in the Event of Accidental Spills

OSHA 1910

1910.106(d)(3)(ii)(a) . . .The door sill shall be raised at least 2 inches above the bottom of the cabinet.

NFPA 30

6.3.3.2.c. The doorsill shall be raised at least 50 mm (2 in.) above the bottom of the cabinet to retain spilled liquid within the cabinet.

FM 6050

3.2.1.C. Cabinets shall be equipped with a leak-tight spill containment sump or pan not less than 2 in. (51 mm) deep.



Two Vents w/ Flash Arrestors

FM 6050

3.2.1.D. Cabinets may be equipped with upper and lower diametrically opposed side vents. . . All vents shall be equipped with a flame arrester and a means of plugging the vents externally.

OSHA 1910

1910.106(d)(3)(ii)(a) The door shall be provided with a three-point lock

NFPA 30

6.3.3.2.c. The door shall be provided with a three-point latch arrangement.

FM 6050

3.2.1.B. Door(s) of the cabinet shall be equipped with a lockable, non-sparking, three-point latching mechanism.



Non-sparking closure w/ 3-Point, Self-Latching Doors





Self-Closing Mechanism segregated from interior of cabinet and contents stored

OSHA 1910

106(e)(6)(i) "General." Adequate precautions shall be taken to prevent the ignition of flammable vapors. Sources of ignition include but are not limited to open flames; lightning; smoking; cutting and welding; hot surfaces; frictional heat; static, electrical, and mechanical sparks;



Fusible Link Assembly on Self-Closing Models

FM 6050

3.2.1.F. . . . If a means for holding the door(s) open is provided, this device shall automatically release the doors in the event of a fire or exposure to excessive heat. The device shall release the closing mechanism when exposed to a temperature of 212°F (100°C) or less.

OSHA 1910

307(c)(3). Safe for the hazardous (classified) location . . . Note: The National Electrical Code, NFPA 70, contains guidelines for determining the type and design of equipment and installations which will meet this requirement. The guidelines of this document address electric wiring, equipment, and systems installed in hazardous (classified) locations and contain specific provisions for the following: (including) . . . Grounding.



Static Ground Connections

NFPA 70

ARTICLE 250.8. Grounding conductors and bonding jumpers shall be connected by exothermic welding, listed pressure connectors, listed clamps, or other listed means. . . Sheet metal screws shall not be used to connect grounding conductors or connection devices to enclosures.

FM 6050

3.2.1.E. A means shall be provided for attaching a separate grounding wire to the exterior of the cabinet. The attachment means shall be such that the cabinet finish does not interfere with the establishment of a proper ground.

OSHA 1910

1910.106(d)(3)(ii). Cabinets shall be labeled in conspicuous lettering, "Flammable - Keep Fire Away."

FM 6050

3.3.1. Cabinets shall, as a minimum, be labeled with the manufacturer's name, address, model number, and maximum liquid storage capacity.


3.3.2. All Approved cabinets shall be labeled with an FM Approval Mark

3.3.3. Cabinets shall be labeled with the conspicuous legend: FLAMMABLES – KEEP FIRE AWAY.

3.3.4. All markings shall be legible and durable.



Bold, clear labeling



Adjustable Leveling Legs

FM 6050

3.4. The manufacturer shall provide instructions pertaining to proper leveling of the cabinet



Locking Handle

OSHA 1910

1910.106(d)(3)(ii)(a). The door shall be provided with a three-point lock

FM 6050

3.2.1.B. Door(s) of the cabinet shall be equipped with a lockable, non-sparking, three-point latching mechanism.

Recognize your needs before they become your faults

What are Outdoor Storage Lockers/Buildings used for?

SECURALL Outdoor Storage lockers/buildings are used to store Hazardous Materials, Flammables, Pesticides, Herbicides and other Agri-chemicals in a safe, secure storage area. Each is equipped with a sump area designed to prevent leaky containers from contaminating the area.

Which materials require storage in a Locker/Building?

All Flammable & Combustible Liquids in an outside location must be stored in a designated storage unit. Other hazardous materials stored outside that may leak and cause contamination should also be stored in a designated storage unit. SECURALL Outdoor Storage Lockers/Buildings are approved for storage of flammable & combustible liquids, except for storage of Class 1A and dispensing of Class 1A and 1B Flammable Liquids (*refer to NFPA Code 30*). Explosion relief is required for buildings storing and dispensing Class 1A and 1B Flammable Liquids.

Securall Haz-mat storage units come standard with Explosion Relief to meet this criterion. All standard models are FM Approved.



What is the difference between a Locker and a Building?

Lockers are used to store a quantity of chemicals that do not exceed the control area. Quantities of chemicals that exceed the control area require a Building for storage. Lockers are also less likely to be subject to State Approvals. Check with your local Authority having jurisdiction.



Can I store several different chemicals in the same Locker/Building?

You should classify the chemicals you intend to store according to hazard. Those that are compatible can be stored in the same outdoor storage unit. Incompatible chemicals should be stored in separate outdoor storage units or as required by OSHA.

How should I store incompatible materials?

Outdoor storage units can be designed with a separation wall allowing you to store incompatible materials. Safety cabinets can also be installed inside the locker or building to separate the different materials. Contact your local Authority Having Jurisdiction to determine the appropriate solution for your situation.

Code Compliance

To help you store and dispense hazardous materials in a safe and efficient manner SECURALL Safety Storage Buildings are designed to meet or exceed the following BUILDING CODES, INDUSTRY CONSTRUCTION STANDARDS and FEDERAL REGULATIONS:

Codes

UBC - Uniform Building Code
SBC - Southern Building Code
UFC - Uniform Fire Code
NEC - National Electric Code
CAC - California Administrative Code

Standards

NFPA - National Fire Protection Association
BOCA - Building Officials & Code Administrators
AWS - American Welding Society
AISC - American Institute Of Steel Construction
ANSI - American National Standard Institute
ASTM - American Society For Testing & Material
USPC - United States Product Code
ICC - International Code Council

Regulation

EPA - Environmental Protection Agency Regulations
OSHA - Occupational Safety & Health Act Regulations.

Where should outdoor storage units be placed?

SECURALL Outdoor Storage units should be placed outside, on level ground, or on a concrete slab. Consult your local Authority having jurisdiction regarding building separation distances and limits.

Which construction standards are relevant to Outdoor Storage Lockers/Buildings?

The following Building Codes are met: UBC, SBC, UFC, NEC and CAC. The following Industry Construction Standards are met: NFPA, BOCA, AWS, AISC, ANSI, ASTM, ICC and USPC. The following Federal Regulations are pertinent: EPA and OSHA.

What size Locker/Building do I need?

For any Outdoor Safety Storage unit, the storage capacity is ultimately determined by the capacity of the sump. OSHA requires sump capacity to contain 25% of the total holding capacity or 100% of the largest container whichever is greater; so if we were to measure by how many 55 - gallon drums you want to store in a locker/building, SECURALL® has standard sizes for 2, 4, 6, 9, 12, 16, 24, 32, 48, 64 and 80 - drum sump capacity. You can also custom-design the building by specifying the height, width and depth of the storage unit yourself.

Is there a maximum size for a Locker/Building?

Floor area should not exceed 1500 square feet.

Custom Storage Buildings

DESIGN & FABRICATION



Custom Storage Buildings



* Complies with OSHA Regulations
~ Designed in Accordance with Specifications set forth by the National Fire Protection Association

FM Factory Mutual Tested and Approved

★ Best Seller!



SECURALL PRODUCTS
Are manufactured in the U.S.A.



FOB: LaPorte, IN 46350

SECURALL®

Manufactured By
A & A Sheet Metal Products
5122 N. State Road 39
P.O. Box 1848

La Porte, IN 46352-1848
Phone 1-888-326-7890

Fax 1-888-324-3780

Email sales@securallproducts.com

securallproducts.com

